


The smallest
below
the safest...



Fire damper BKP



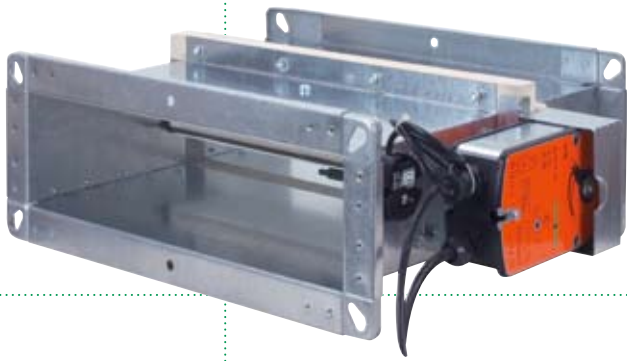

Available sizes:	
W (mm)	H (mm)
100	100
150	150
200	200
250	250
300	300
400	
500	
600	
700	
800	

- General building inspection certificate Z-41.3-660
- No circumferential stop profile and a damper blade of 25 mm increase the free cross section. Thus the pressure drop and the sound intensity are reduced. The advantages for the operator of the ventilation system are low energy costs and reduced noise.
- Installation in massive walls and ceilings, in light-weight partition walls according to DIN 4102-4 or outside of walls
- Damper blade made of abrasion-resistant silicate structural insulating panel. Hygienic impeccable and easy to clean according to VDI 6022
- Accessories: Limit switch type ES, electric spring return motor type ELD-BLF, smoke detector device type RMS-L, KOMES, Interlocking grating type ASG, Flexible connection piece type FS, Extension piece Typ VT

Housing length L=375mm standard and L=500mm at an extra charge. All heights and widths combinable!
Other dimensions on request.
Release device always on H side

Specification texts

Shallow fire damper made of galvanized sheet steel fire resistance class K 90, with general building inspection certificate Z-41.3-660. In square or rectangular form for locking of fire lobbies in ventilation and air conditioning systems. Installed with horizontal or vertical damper axis. 25mm shallow damper blade made of silicate structural insulating panel. Without sound raising damper blade stops. Fixed setting when damper is open. Damper bearing large dimensioned. For installation in solid walls and ceilings, in lightweight partition walls according to DIN 4102-4 Table 48, or outside of walls. Approved for connection to a non-flammable ventilation ducts. Installation flange to flange. For installation, on one side non-flammable duct, on the other side protective grating type ASG. Insulation and suspension of the fire damper during installation outside of walls must be provided by the customer.

Product: SCHAKO **type BKP**

